

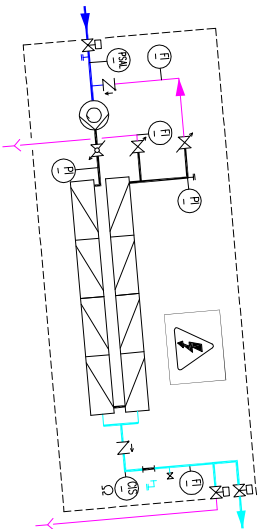
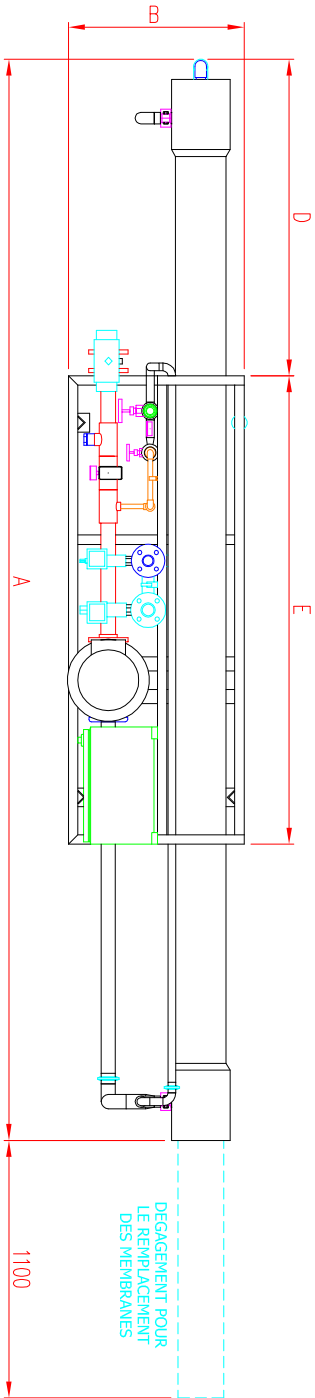


SCHEMA DE PRINCIPE

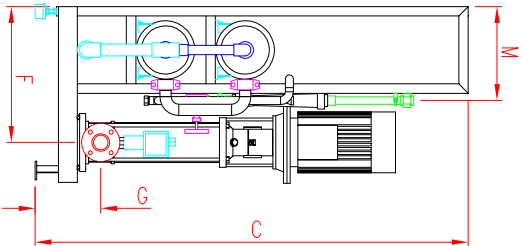

MODELE REPRESENTE:  
**SIGMA 800 HP**  
8 m<sup>3</sup>/H

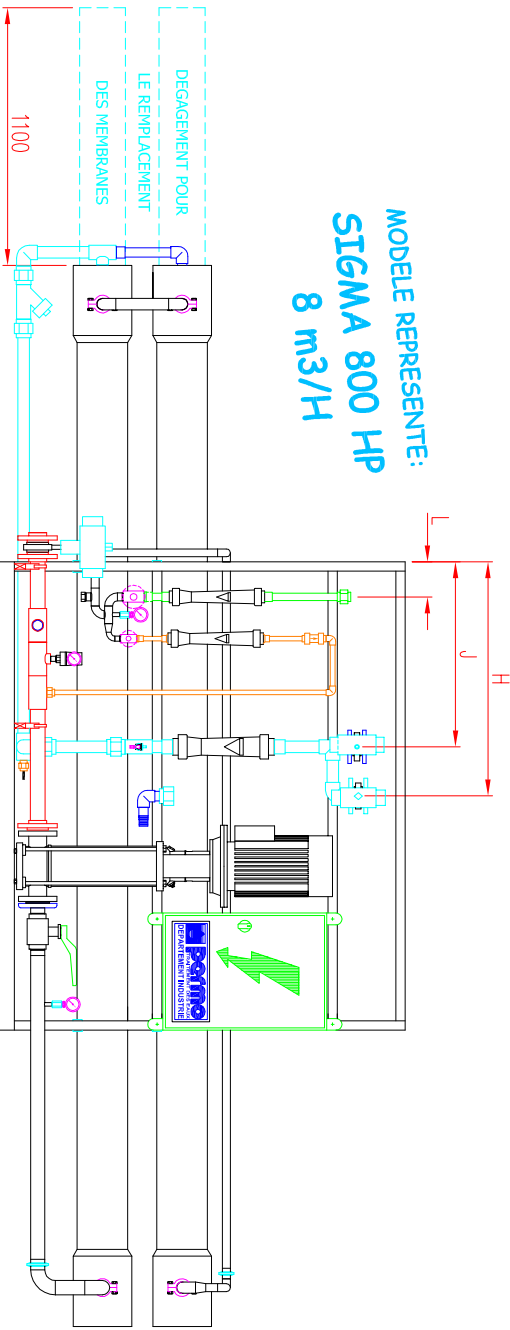

**GAMME SIGMA 800 HP**

P = 1,5 bar / T = 15°C / ST ≤ 800 ppm / MEMBRANES ESPA2

| DESIGNATION            |      | DIMENSIONS   |      |      |      |     |     |    |      |                  |    |      |     |    |     |     |    |      |                      | POIDS<br>en kg |
|------------------------|------|--------------|------|------|------|-----|-----|----|------|------------------|----|------|-----|----|-----|-----|----|------|----------------------|----------------|
|                        |      | ENCOMBREMENT |      |      |      |     |     |    |      | ALIMENTATION PVC |    |      |     |    |     |     |    |      | REFET QUALITATIF PVC |                |
| MODELE                 | A    | B            | C    | D    | E    | F   | G   | DN | H    | I                | DN | J    | K   | DN | L   | M   | DN |      |                      |                |
| SIGMA 800 HP 4 m³/H    | 4610 | 750          | 1850 | 1345 | 2000 | 580 | 270 | 32 | 1000 | 405              | 32 | 790  | 405 | 25 | 150 | 400 | 15 | 380  |                      |                |
| SIGMA 800 HP 5 m³/H    | 5625 | 750          | 1850 | 1355 | 3000 | 580 | 270 | 32 | 1500 | 405              | 32 | 1290 | 405 | 25 | 350 | 400 | 20 | 430  |                      |                |
| SIGMA 800 HP 6 m³/H    | 3605 | 750          | 1850 | 845  | 2000 | 580 | 270 | 40 | 1000 | 410              | 40 | 790  | 410 | 32 | 150 | 400 | 20 | 490  |                      |                |
| SIGMA 800 HP 8 m³/H    | 4615 | 750          | 1850 | 1350 | 2000 | 580 | 280 | 50 | 1000 | 410              | 40 | 790  | 410 | 32 | 150 | 400 | 25 | 610  |                      |                |
| SIGMA 800 HP 10 m³/H   | 5640 | 750          | 1850 | 1370 | 3000 | 580 | 280 | 50 | 1500 | 420              | 50 | 1290 | 420 | 40 | 500 | 400 | 25 | 700  |                      |                |
| SIGMA 800 HP 12.5 m³/H | 4625 | 750          | 1850 | 1360 | 2000 | 580 | 280 | 65 | 1000 | 420              | 50 | 790  | 420 | 40 | 150 | 400 | 25 | 800  |                      |                |
| SIGMA 800 HP 15 m³/H   | 5645 | 750          | 1850 | 1375 | 3000 | 580 | 280 | 65 | 1500 | 430              | 65 | 1290 | 430 | 50 | 500 | 405 | 32 | 960  |                      |                |
| SIGMA 800 HP 20 m³/H   | 5645 | 750          | 1850 | 1375 | 3000 | 580 | 295 | 80 | 1500 | 430              | 65 | 1290 | 430 | 50 | 500 | 410 | 40 | 1240 |                      |                |

**GAMME SIGMA 2500 HP**

P = 1,5 bar / T = 20°C / ST ≤ 2500 ppm / MEMBRANES ESPA2

| DESIGNATION             |      | DIMENSIONS   |      |      |      |     |                  |    |      |     |    |                      |     |    |     |     |                 |      |  | POIDS<br>en Kg |
|-------------------------|------|--------------|------|------|------|-----|------------------|----|------|-----|----|----------------------|-----|----|-----|-----|-----------------|------|--|----------------|
| MODELE                  |      | ENCOMBREMENT |      |      |      |     | ALIMENTATION PVC |    |      |     |    | REFET QUALITATIF PVC |     |    |     |     | REFET EGOUT PVC |      |  |                |
|                         |      | A            | B    | C    | D    | E   | F                | G  | DN   | H   | I  | DN                   | J   | K  | DN  | L   | M               | DN   |  |                |
| SIGMA 2500 HP 4 m³/H    | 4610 | 750          | 1850 | 1345 | 2000 | 580 | 270              | 32 | 1000 | 405 | 32 | 790                  | 405 | 25 | 150 | 400 | 15              | 380  |  |                |
| SIGMA 2500 HP 5 m³/H    | 5625 | 750          | 1850 | 1355 | 3000 | 580 | 270              | 32 | 1500 | 405 | 32 | 1290                 | 405 | 25 | 350 | 400 | 20              | 430  |  |                |
| SIGMA 2500 HP 6 m³/H    | 3605 | 750          | 1850 | 845  | 2000 | 580 | 270              | 40 | 1000 | 410 | 40 | 790                  | 410 | 32 | 150 | 405 | 20              | 500  |  |                |
| SIGMA 2500 HP 8 m³/H    | 4615 | 750          | 1850 | 1350 | 2000 | 580 | 270              | 50 | 1000 | 410 | 40 | 790                  | 410 | 32 | 150 | 405 | 25              | 600  |  |                |
| SIGMA 2500 HP 10 m³/H   | 5640 | 750          | 1850 | 1370 | 3000 | 580 | 280              | 50 | 1500 | 420 | 50 | 1290                 | 420 | 40 | 350 | 400 | 25              | 710  |  |                |
| SIGMA 2500 HP 12.5 m³/H | 6650 | 750          | 1900 | 1875 | 3000 | 580 | 280              | 65 | 1500 | 420 | 50 | 1290                 | 420 | 40 | 350 | 410 | 25              | 820  |  |                |
| SIGMA 2500 HP 15 m³/H   | 5645 | 750          | 1850 | 1375 | 3000 | 580 | 280              | 65 | 1500 | 430 | 65 | 1290                 | 430 | 50 | 350 | 405 | 32              | 960  |  |                |
| SIGMA 2500 HP 20 m³/H   | 5645 | 750          | 1910 | 1375 | 3000 | 580 | 295              | 80 | 1500 | 430 | 65 | 1290                 | 430 | 50 | 350 | 410 | 40              | 1250 |  |                |